

# CHART PLOTTER

**NES-3010G**

NSR's new generation of Chart Plotter:

- Chart + AIS Display + GNSS Navigator, 3 in 1
- Meet the IMO regulation and IEC standards
- Touch screen operation
- Android system
- Easy to upgrade



- NES-3010G is designed for vessel navigational aid, which can work together with AIS, to provide GNSS navigator aid and AIS presentation, and also can work alone as a GNSS navigator.
- NES-3010G conforms to the international standards, such as IMO MSC.112 (73), IEC 60945, IEC 61108-1, IEC 61162-1 etc.



## SPECIFICATIONS

- OS: Android
- LCD DISPLAY: Touch screen operation
- Size: 10.1 inch
- Resolution: 1280×800
- Interface: RS232×1, USB×1 (NES-3010)  
RS422×2, USB×1, ANT×1 (NES-3010G)
- Power Supply: DC 24 V (range 9 V ~ 36 V)
- IP Grade: IP22 (Plotter)  
IP66 (Antenna)

## EQUIPMENT LIST

### ● STANDARD (INDEPENDENT PLOTTER)

- Plotter NES-3010G 1 pc
- GNSS Antenna NGA100 1 pc
- Accessories 1 set

### ● STANDARD (PLOTTER USED WITH AIS)


- Plotter NES-3010 1 pc
- Accessories 1 set

### ● OPTIONS


- Flush Mount Bracket 1 pc

## SYSTEM DIAGRAM

Plotter used with AIS:

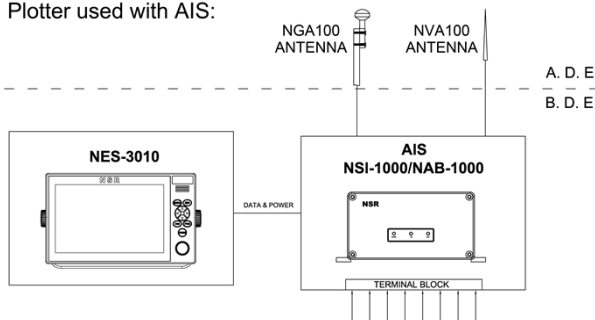

Independent Plotter: GNSS ANTENNA

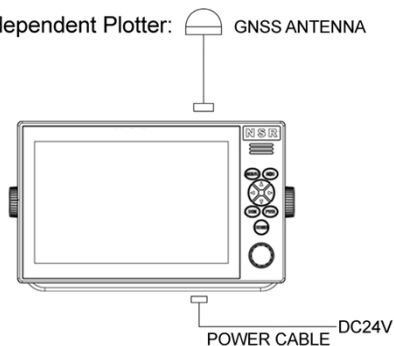

## SIZE DIMENSION

